



Spee-D Basins

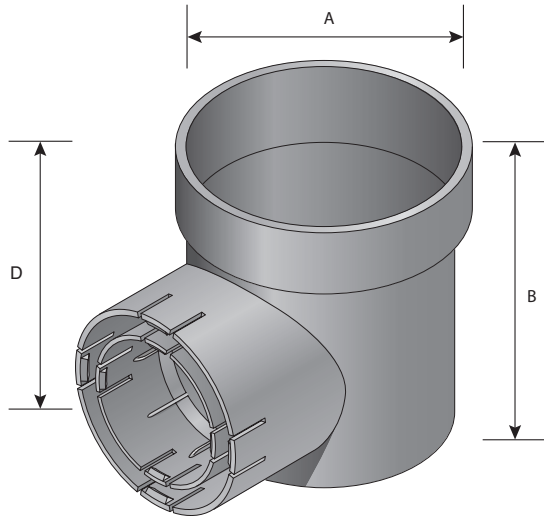


Dimension Key

- A: Diameter
- B: Height
- C: Holding Capacity
- D: Center of Flow
from top of basin
- E: Weight

| Part Number | A | B | C | D | E |
|-------------|-------|-------|------------|--------|------|
| 101 | 6 1/2 | 8 3/8 | .7 gallons | 4 9/16 | 1.6 |
| 201 | 6 1/2 | 8 3/8 | .7 gallons | 4 9/16 | 1.9 |
| 250 | 6 1/2 | 7 7/8 | .7 gallons | 4 3/4 | 1.92 |
| 300 | 6 1/2 | 7 7/8 | .7 gallons | 4 3/4 | 1.92 |
| 350 | 6 1/2 | 7 7/8 | .7 gallons | 4 3/4 | 2.25 |

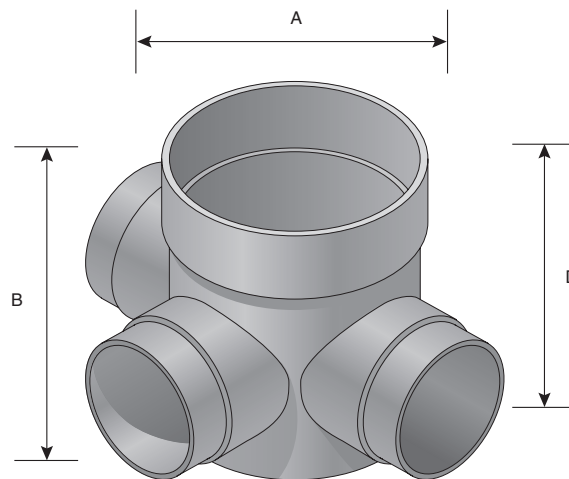

Spee-D Accessories Fabricated 90° Elbow with Grate

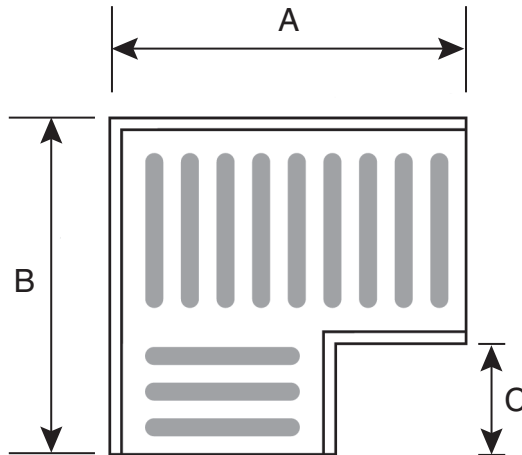

Dimension Key

- A: Width
- B: Height
- C: Height of branch
- D: Weight

*note: Please see catalog

| Part Number | A | B | C | D |
|-------------|--------|--------|-------|---|
| 2380 | 7 7/16 | 7 1/16 | 2 5/8 | 3 |
| 2381 | 7 7/16 | 7 1/16 | 2 5/8 | 3 |
| 2382 | 7 7/16 | 7 1/16 | 2 5/8 | 3 |
| 2383 | 7 7/16 | 7 1/16 | 2 5/8 | 3 |
| 2384 | 7 7/16 | 7 1/16 | 2 5/8 | 3 |
| 2385 | 7 7/16 | 7 1/16 | 2 5/8 | 3 |

Load Recommendation Guide



Class A

- Loads of 1-60 psi.
- Recommended for pedestrians, bicycles and wheel chair traffic.



Class B

- Loads of 61-175 psi.
- Recommended for medium-duty pneumatic tire traffic, autos and light trucks at speeds less than 20 m.p.h.



Class C

- Loads of 176-325 psi.
- Recommended for heavy-duty pneumatic tire forklifts and tractor trailers at speeds less than 20 m.p.h., H-20 rated.




Class D

- Loads of 326-575 psi.
- Recommended for heavy-duty hard tire forklifts at speeds less than 20 m.p.h., H-20 rated.

Note: Some installations may require a concrete collar to meet load rating. Loads are based on encasing product in concrete. Product must be installed using NDS instructions.

Spee-D Accessories

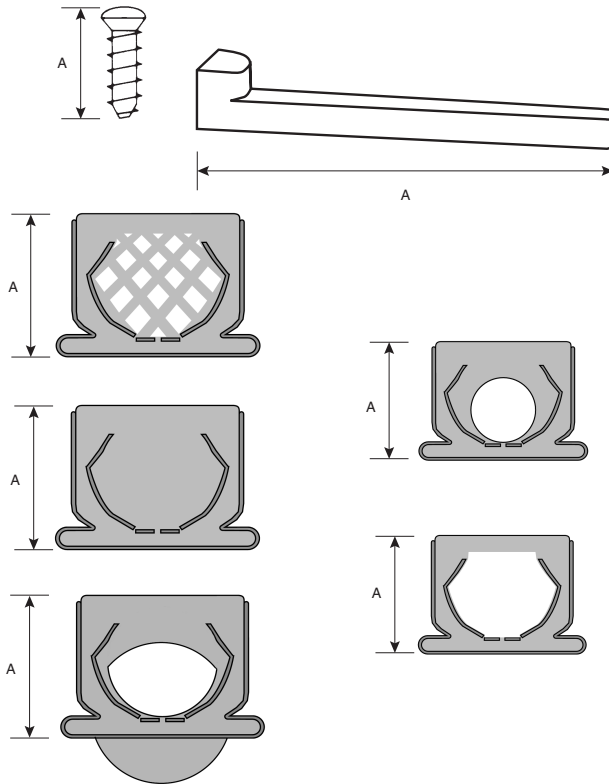

Dimension Key

A: Height
B: Weight

*note: Please see catalog

| Part Number | A | B |
|-------------|-------|------|
| 229 | 1 | 0.06 |
| 230 | 6 | 0.04 |
| 245 | 3 3/4 | 0.35 |
| 246 | 3 3/4 | 0.4 |
| 247 | 3 3/4 | 0.4 |
| 248 | 3 3/4 | 0.4 |
| 249 | 3 3/4 | 0.4 |

Load Recommendation Guide



Class A

- Loads of 1-60 psi.
- Recommended for pedestrians, bicycles and wheel chair traffic.




Class B

- Loads of 61-175 psi.
- Recommended for medium-duty pneumatic tire traffic, autos and light trucks at speeds less than 20 m.p.h.

Note: Some installations may require a concrete collar to meet load rating. Loads are based on encasing product in concrete. Product must be installed using NDS instructions.

Spee-D Accessories Fabricated 45° Elbow with Grate

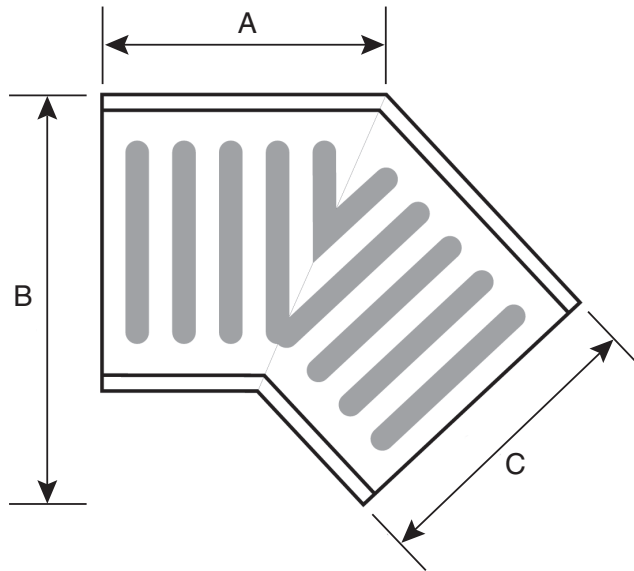

Dimension Key

- A: Width
- B: Height
- C: Weight

*note: Please see catalog

| Part Number | A | B | C |
|-------------|-------|--------|---|
| 2300 | 4 1/2 | 7 1/16 | 2 |
| 2301 | 4 1/2 | 7 1/16 | 2 |
| 2302 | 4 1/2 | 7 1/16 | 2 |
| 2303 | 4 1/2 | 7 1/16 | 2 |
| 2304 | 4 1/2 | 7 1/16 | 2 |
| 2305 | 4 1/2 | 7 1/16 | 2 |

Load Recommendation Guide



Class A

- Loads of 1-60 psi.
- Recommended for pedestrians, bicycles and wheel chair traffic.



Class B

- Loads of 61-175 psi.
- Recommended for medium-duty pneumatic tire traffic, autos and light trucks at speeds less than 20 m.p.h.



Class C

- Loads of 176-325 psi.
- Recommended for heavy-duty pneumatic tire forklifts and tractor trailers at speeds less than 20 m.p.h., H-20 rated.



Class D

- Loads of 326-575 psi.
- Recommended for heavy-duty hard tire forklifts at speeds less than 20 m.p.h., H-20 rated.

Note: Some installations may require a concrete collar to meet load rating. Loads are based on encasing product in concrete. Product must be installed using NDS instructions.